

Project Size

8,064 sq ft

Construction

UBC Type V-b

Facility Use

Pre-K & Kindergarten classrooms


Description

8 classroom building with R-Panel steel siding

Completion

60 days

Relocatable
Modular Buildings

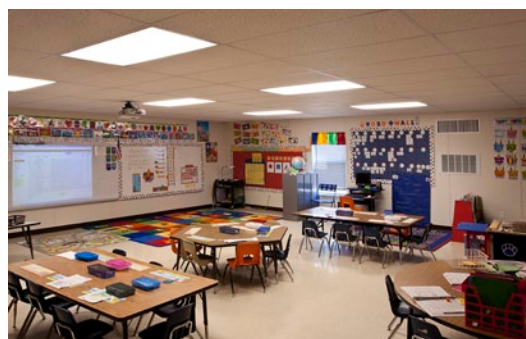

As part of a district wide facility consolidation program that included closing an elementary school, Hico ISD needed to combine their pre-kindergarten and elementary school students into one building. Ramtech manufactured and installed an 8,064 square foot facility that was placed on a portion of the parking lot adjacent to the structures of the current junior high school. The exterior matches the existing architecture and color scheme by utilizing a light stone R-panel exterior with red trim as well as a red metal roof and connecting canopy. The interior incorporates vinyl covered gypsum walls and vinyl composition tile flooring throughout the building. The building also utilizes REDD Team by Sapa's aluminum access steps, ramps and landing system.

RAMTECH[®]
Building Systems
800-568-9376
ramtechmodular.com