



First Progressive Baptist Church

Lubbock, TX

Project Size

4,684 sq ft

Construction

Type V-b

Contract Type

Negotiated

Facility Use

Church facility


Description

Worship center, dining area, office, and classrooms

Completion

90 days

Pier & Beam
Permanent
Modular
Construction

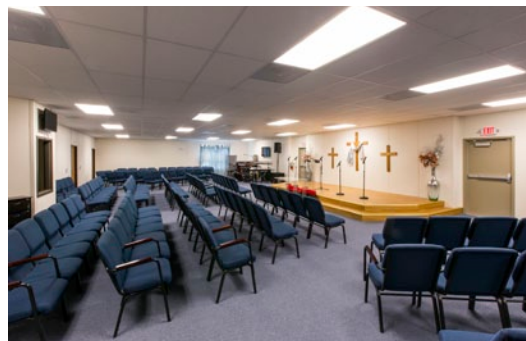

With a facility built in the 1950's that didn't provide for any expansion options, First Progressive Baptist contracted with Ramtech to provide them a new permanent modular building to serve as a new sanctuary with pastoral offices, a large fellowship and dining area, and classrooms. This allowed for the existing structure to be used to serve their growing youth group and other ministry activities. The 4,684 square foot facility sits on a CMU pad on grade foundation and has a Hi-Rib steel siding and roof, along with wall hung HVAC units. The interior floor coverings are a combination of VCT and commercial grade carpet, with VCG for the walls. Ramtech scope of work called for providing the plumbing manifold and a MDP to allow for a single point of connection for the utilities.

RAMTECH[®]
Building Systems
800-568-9376
ramtechmodular.com