



Waste Management CNG

Fort Worth, TX

Project Size

9,016 sq ft

Construction

UBC Type V-B

Contract Type

Negotiated

Facility Use

Office and dispatch center



Description

Four office areas, training room, crew room, conference room, and kitchen/break area

Completion

150 days

Permanent
Modular
Construction

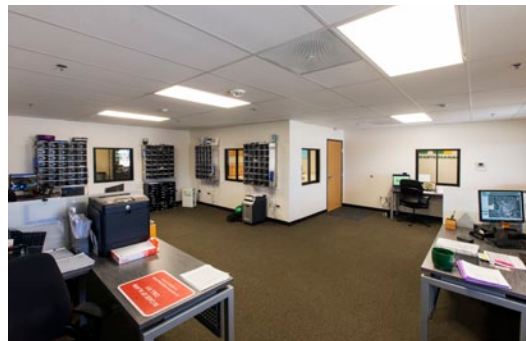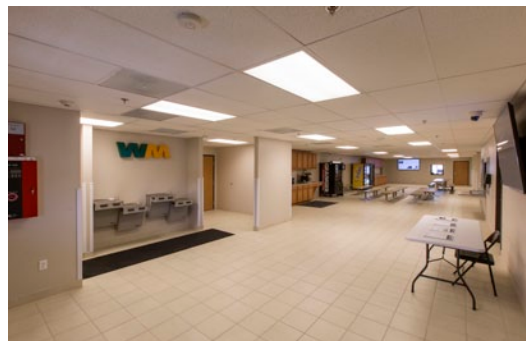

Ramtech constructed this 9,016 square foot office using our pier and beam permanent modular construction method. Waste Management moved their offices to this location to upgrade their facilities and provide for natural gas refueling stations for their waste collection trucks. The type V-B facility includes an open office area for the clerical and dispatch staff and supervisory personnel, training and crew room, locker room, a secure office area with conference room, and a full kitchen and break room. The exterior uses an EIFS siding and includes metal canopies over the exterior concrete steps and ramps. The inside is finished with texture painted walls and ceramic tile flooring with carpet tile in the office areas. Heating and cooling of the building is accommodated with a rooftop HVAC packaged unit.

RAMTECH[®]
Building Systems
817-473-9376
ramtechmodular.com