



First Baptist Church at The Fields

Carrollton, TX

Project Size

26,624 sq ft

Construction

UBC Type Vb

Contract Type

Negotiated

Facility Use

Adult and student education


Description

Two worship areas, 13 classrooms, and lounge

Completion

160 days

Pier & Beam
Permanent Modular
Construction

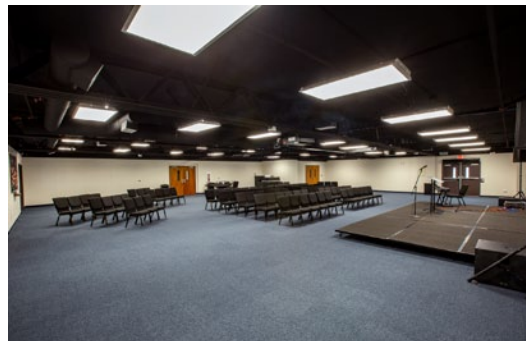

When the Church relocated they required new education space for their adult and youth ministries. The pier and beam permanent modular construction project required a 10,624 square foot facility with seven classrooms for adults and a 16,000 square foot building with two large worship areas and six classrooms for junior and high school students. Ramtech worked with the church's general contractor to develop the building pads for a grade beam foundation system with drilled and belled piers. The buildings incorporate parapet walls with full masonry exteriors to match the main structure. The interior finishes include VCG walls and a combination of carpet tile, vinyl composition tile, and sheet vinyl flooring. Heating and cooling are accommodated with zoned split system HVAC units.

RAMTECH
Building Systems
800-568-9376
ramtechmodular.com